



FEATURES

- High reliability flow control
- 7 Segment LED Display
- Compatibility various
- BLDC Motor, Reversible
- MPTION Control
- Overload Safety
- Clean Enclosure
- CE mark : EN61010-1, EN61326-1


INTERNAL DRIVE CONTROL

- RPM : 0.1 ~ 600
- Flow rate : 0.006 ~ 3400 mL/min
- Direction
- Timer
- Anti Drop
- START/STOP, AUTO START

REMOTE DRIVE CONTROL

- Start/Stop, CW/CCW
- Speed Control IN : 4 ~ 20mA
- RS485 Interface
- Foot Switch

DIGITAL TechPre COMPACT DISPENSING DRIVE




MODEL N o. JWC600

Flow Rate (mL/min)

Tubing In diameter mm (inch)	0.8 (1/32")	1.59 (1/16")	3.18 (1/8")	4.76 (1/16")	6.35 (1/4")	7.9 (5/16")	4.76 (3/16")	6.35 (1/4")	7.9 (5/16")	9.53(3/8")
Tubing Wall Thickness	1.6 mm (1/16")						2.4 mm (3/32")			
Flow range (0.1~ 600 rpm)	0.006 ~ 36	0.021~ 130	0.08~ 480	0.17~ 1000	0.28~ 1700	0.38 ~ 2300	0.18 ~ 1000	0.28~ 1700	0.38~ 2300	0.48~ 2900

SPECIFICATION





Description	JWTC600
Flow range	0.006 ~ 3400mL/min
RPM	0.1 ~ 600
Head accepted	2
Maximum torque	1.6 ~ 30 kg-cm
Reversible	Yes
External Input	4~20mA, CW/CCW, START/STOP, RS485
Voltage	230V~, 50/60Hz
Current	1.0A at 230V
Fuse rating	T3.0 A / 250V
Motor type	BLDC
Motor size	60W
Display	7 Segment LED
Motor control	MOTION Control
Speed regulation	±0.1% Speed control
Electronic brake	Yes
Housing materials	ABS V0 Plastic Housing / Aluminum Painted
Certificated	CE mark : EU low voltage, EU EMC
OperatingTemp.	0 ~ 40°C
Storage Temp.	-15 ~ 65°C
Dimensions	28(L)x21(W)x23.3(H) cm
Weight	4.6 kg

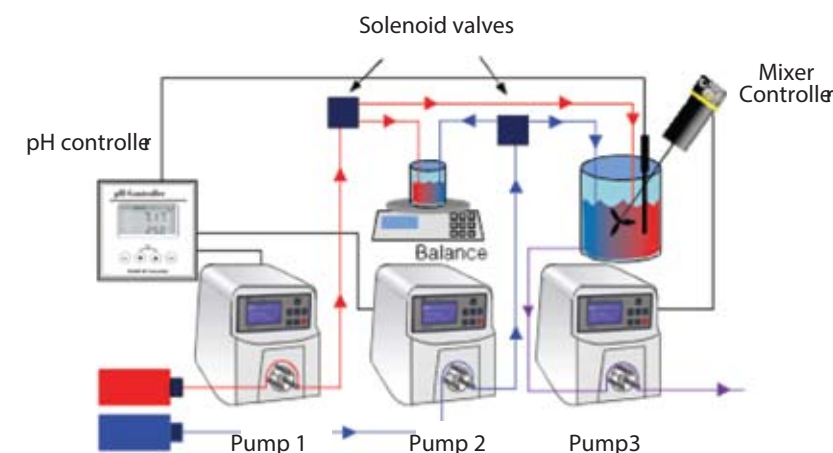

- High Accuracy
- Low Price

JenieWell TechPre Compact Pump Drive System

Dimension cm(inch)

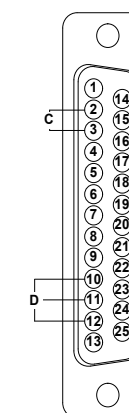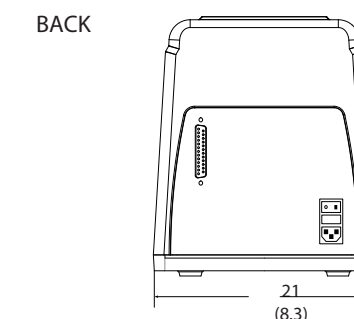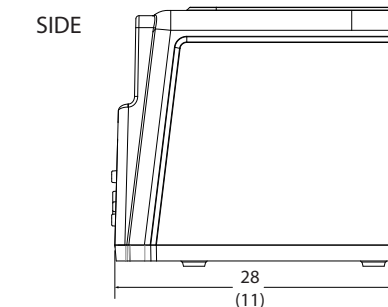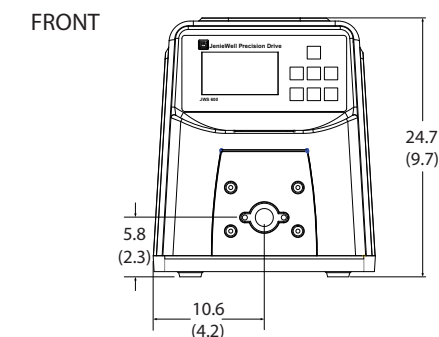

- A. START / STOP
- B. CW/CCW
- C. INPUT : 4 ~ 20mA
- D. RS485 (10 TR)